


## TURBOKOMPRESORA MARĶĒŠANA SEALING OF THE TURBOCOMPRESSOR

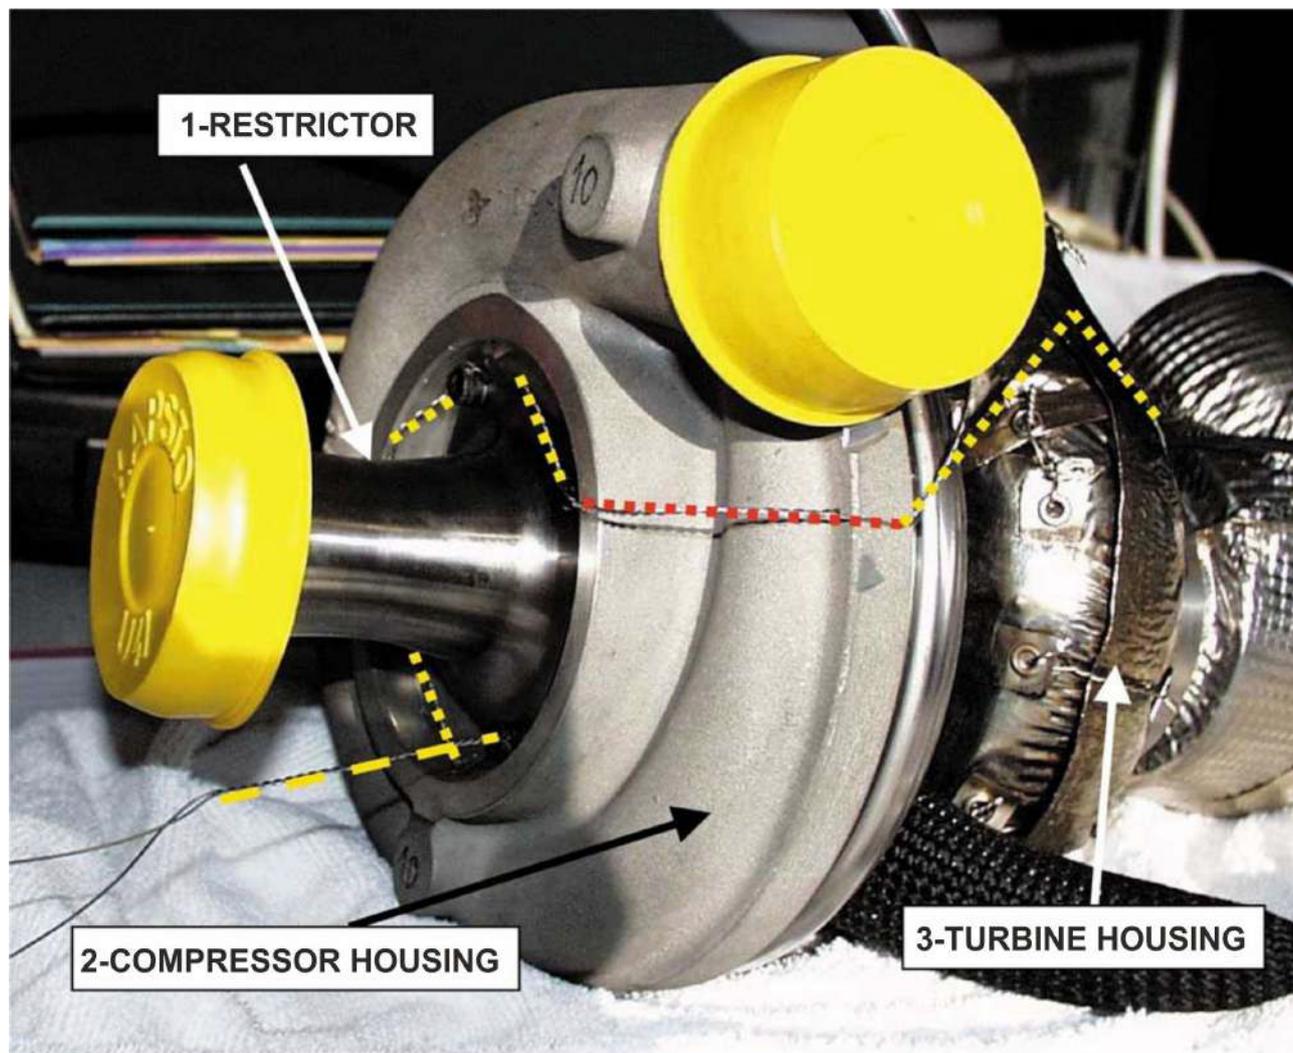

**TURBOKOMPRESORU SAGATAVOŠANAS PARAUGS MARĶĒŠANAI  
SAMPLE OF SEALING OF TURBO COMPRESSORS**

**Pielikuma punkti 254-6.1. (grupa N) un 255-5.1.8.3. (Grupa A) paredz:**

Restriktoram jābūt izgatavotam no viendabīga materiāla un to jāparedz caururbt tikai montāžai un plombēšanai, kas jāveic starp montēšanas skrūvēm, starp restriktoru (vai restriktora / kompresora korpusa stiprinājumiem), kompresora korpusu (vai korpusa / atloka stiprinājumu) un turbīnas korpusu (vai korpusa / atloka stiprinājumu) (skatīt 254-4. zīmējumu).

**The articles 254-6.1 (Group N) and 255-5.1.8.3 (Group A) from Appendix J state:**

The restrictor must be made from a single material and may be pierced solely for the purpose of mounting and sealing, which must be carried out between the mounting screws, between the restrictor (or the restrictor / compressor housing attachment), the compressor housing (or the housing / flange attachment) and the turbine housing (or the housing / flange attachment) (see drawing 254-4).