

# SCHROTH RACING

## INSTALLATION MANUAL SCHROTH FRONTAL HEAD RESTRAINT [FHR]

Edition: 09/2017  
Part No: EA 16.3

Thank you for choosing our product.

### OVERVIEW




Read and follow all **WARNINGS**, **CAUTIONS** and **SAFETY INSTRUCTIONS**

## SAFETY INSTRUCTIONS

- \* A FHR is not a substitute for skill or experience. Do not attempt potentially hazardous manoeuvres while wearing a FHR that you would not attempt without a FHR.
- \* FHR is available in medium and large. Sizing is based on body size and shape. Consult your FHR reseller for assistance on determining the correct size.
- \* Failure to ensure that the FHR fits correctly will reduce the effectiveness of the FHR and may subject the user to unexpected risks.
- \* A cracked, bent or deformed FHR or any FHR worn by a user during an accident or impact should not be used again by anyone. Damage affecting the structural integrity and performance of the FHR may not be visible to the naked eye.

The FHR is worn over your shoulders and under your safety harness belts.

The centre line [shown in red] defines the lower tip of the FHR. The shoulder belt length adjusters [shown in green] should rest a maximum of 3" [70 mm] above the tips of the FHR or a maximum of 1.5" [35 mm] below the tips of the FHR.

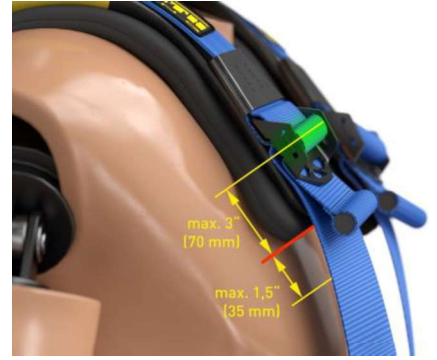

## ! WARNING

**Risk of severe injury or death!**

**Never modify the hardware, components or body of FHR. Any modifications to the FHR may reduce the effectiveness of the product.**



Ensure that the tethers attached to the harness and helmet without twisting.