

Installation Guidelines

1. MOUNTING THE DEVICE


- Install the GPS tracker horizontally, with the screen facing the (co-)driver.
- Mount it securely on the RAM mount, ideally on the roll cage as shown in the pictures.
- Ensure the unit is stable and free from vibration or direct impact.



2. POWER CONNECTION

OPTION 1: USE EXISTING USB POWER SUPPLY

- Use an existing USB power supply in the vehicle.
- The USB power source must be located within 1 meter of the tracking device.
- Connect the tracker's USB power cable to the USB converter.
- Check that the tracker powers on automatically.

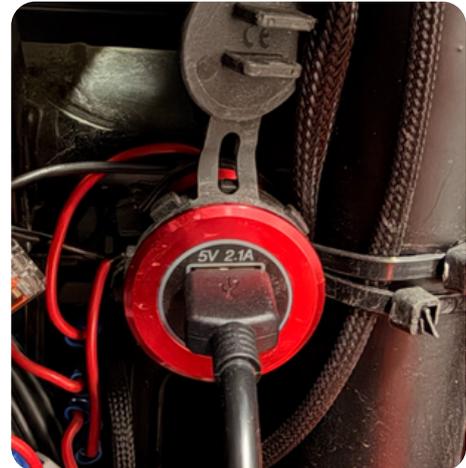

OPTION 2: INSTALL USB CONVERTER

- Install the PV-USB2 converter and provide a 12V power supply.
- The USB power source must be located within 1 meter of the tracking device.
- Connect the tracker's USB power cable to the USB converter.
- Check that the tracker powers on automatically.



3. CABLE ROUTING

- Route the cable neatly along existing wiring or the roll cage.
- Avoid sharp bends and keep the cable away from moving parts.
- Use zip ties to secure it in place.



4. FINAL CHECK

Confirm the screen shows:

- GPS time
- Connection status (Green)
- Speed (0 km/h when stationary)
- Battery is charging