
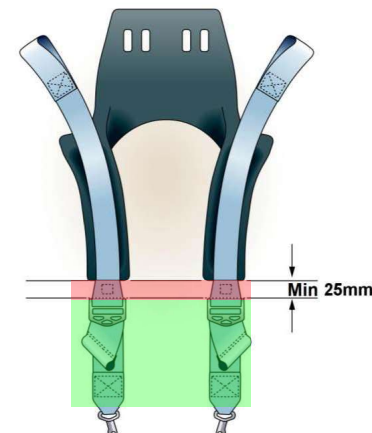


Frontal Head Restraint – Harness Interaction

Adjuster


Maximum **70 mm above** the bottom edge of the yoke

Minimum **25 mm below** the bottom edge of the yoke


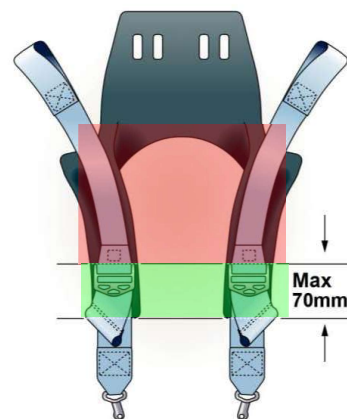


Belt Routing

HANS can have wings/tabs
HANS devices are compatible with 2" and 3" belts
The belts must be correctly positioned to avoid belt slippage
HANS may have additional yoke brackets

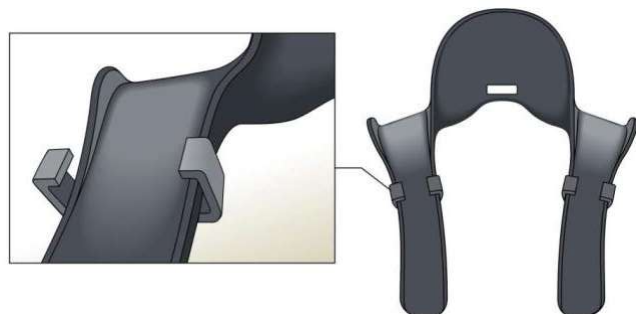

Routing of 2" webbing



Routing of 3" webbing

