





Frontal Head Restraint – Harness Interaction

Adjuster

Maximum **70 mm** above the bottom edge of the yoke


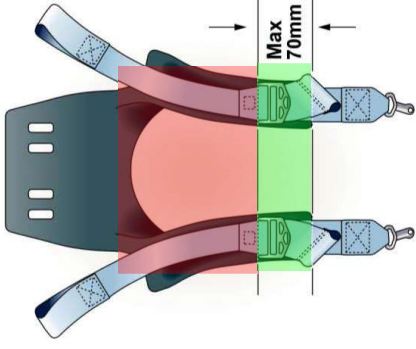


Minimum **25 mm** below the bottom edge of the yoke

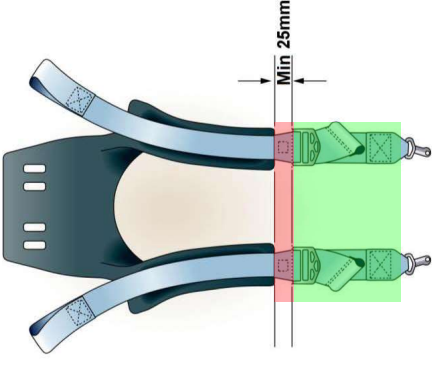


Belt Routing

HANS can have wings/tabs
HANS devices are compatible with 2" and 3" belts
The belts must be correctly positioned to avoid belt slippage
HANS may have additional yoke brackets

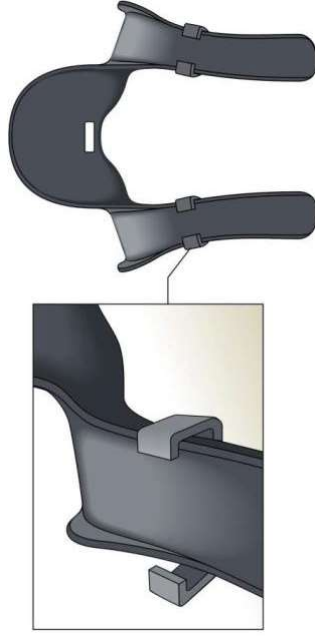

Routing of 2" webbing

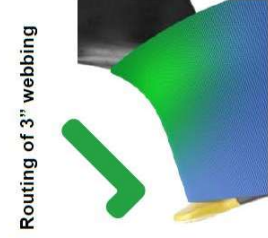

Routing of 3" webbing

