

CROSS COUNTRY AND TT CHAMPIONSHIPS INSTALLATIONS KITS

For 2024 season all **4 wheels vehicles** must have installed before go through scrutineering the following Items.

1º- [KIT STELLA ROADBOOK](#)



2- [KIT INSTALACIÓN](#) Stella EVO



TOTAL ANTENNAS TO INSTALL IN VEHICLE 3

TABLET / DIGITAL ROADBOOK ANTENNAS

1. RF Antenna **GREEN** Conector



2. GPS Antenna **BLUE** Conector



STELLA EVO ANTENNAS

3. Dual Antena 2 Conectores

RF Antenna **YELLOW** Conector

GPS Antenna **BLUE** Conector



INSTALL MANUAL STELLA ROADBOOK / TABLET



Stella Tablet Bracket,

- It will be installed as in the photo with the velcro in the upper area.
- Connections for power cable and antennas are on the back, so it is mandatory to drill the panel where it is going to be installed.
- Optionally it can also be fixed to the board, it is mandatory to leave a minimum separation of 25mm between the board and the support, so that the connections can be kept behind.


Rear view of the tablet with connection cables



Tablet placed in its bracket,

INSTALL MANUAL STELLA EVO DEVICE

Drilling measurements diagram

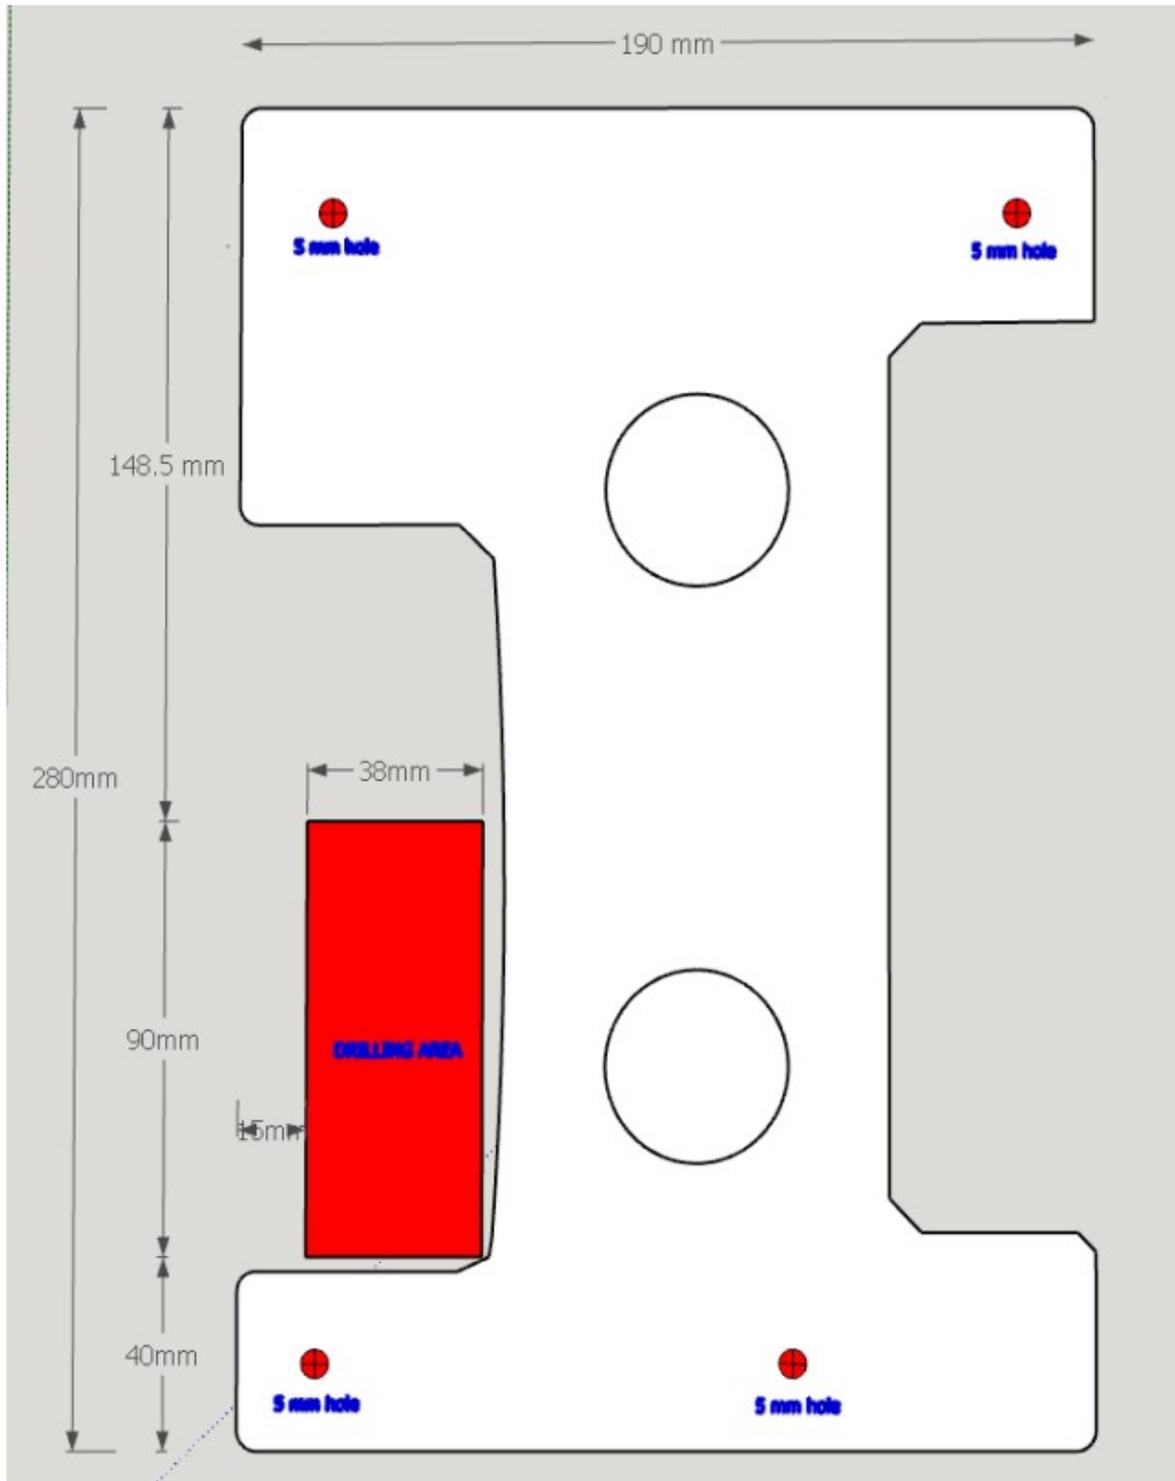


1. POWER CORD

- Connect the red wire to the positive end of the battery 12V(+), and the grey wire to the negative end (GRD). The power cord must be connected directly to the battery (without interruptions and without contact in the power supply).
- A 3A fuse (not included) should be connected to the red wire.
- Take the cord to the location in which the STELLA III EVO is to be installed. All other wires must be insulated, they cannot touch.



2. BASE/MOUNT

- Motorcycles and ATV: The mount can be attached to the handle bar or to a metal plaque close to the navigation system.
- Cars and UTV: The mount can be attached to the panel, or to the roll cage bars. STELLA III EVO buttons must be visible and accessible to the participant (pilot/navigator) even when they are sitting and with the seatbelts buckled.

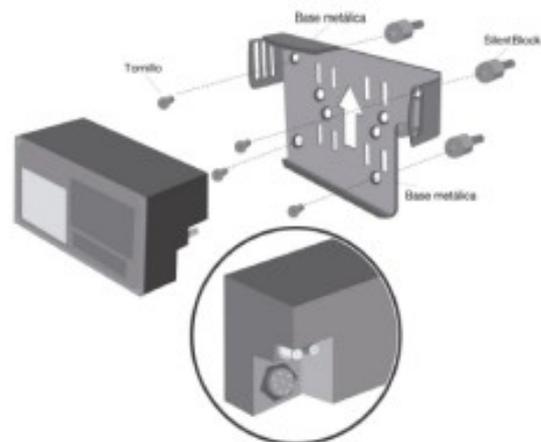

IMPORTANT

Leave the cords (antenna and battery) in place with at least 10 cm to spare for easy handling.
At least 5 cm of space behind the mount (bottom right corner) to allow space for power cord/connections.